



High-Precision Weigh Modules WM Designed for Automation



Fast

Split-second stabilization times even in harsh environments, 38 updates per second.



Rugged

Proven METTLER TOLEDO MonoBloc technology. FDA-approved stainless steel housing with smooth surface. Optional water and dust protection of IP66 for integration in wash-down applications. Built-in overload and torsion protection.



High precision


Accurate to 0.1 mg, even in industrial environments, state of the art signal processing. Adjustment with built-in or external adjustment weight.



Specially developed for use in automated processes.

A professional solution for new horizons in dispensing and weight determination.

The WM product line combines the precision and quality of high-tech weighing sensors with modular, easy-to-integrate design and flexible connectivity.

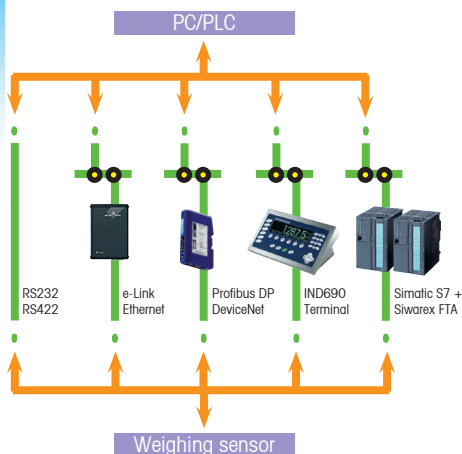

Direct

Direct data transfer via RS232 or RS422 to your PLC. Optional communication via accessory modules with Profibus DP, DeviceNet or Ethernet TCP/IP. Can be directly connected to SIWAREX FTA. Detailed documentation and commissioning software included.

WM line - the sum of all advantages:

- Weighing range from 120 g to 6 kg
- 0.1 mg readability (WM124)
- Directly connects to control systems
- Increased speed and accuracy of filling processes
- Optimized use of valuable materials
- Enhanced process safety
- Reduced cycle times
- Increased production volume
- Minimized downtimes

METTLER TOLEDO

nefton
Ζύγιση
Σήμανση
Συμμόρφωση

Νέων Τεχνολογιών ΑΒΕΕ
Γέρακα 113, Τ.Θ. 67934
15344 Γέρακας
Τηλ: 210 6654544
Fax: 210 6654545
marketing@nefton.gr
www.nefton.gr

WM Weigh Module Specifications



Model	WM124	WM123	WM503	WM3002	WM6002
Maximum capacity	121 g	121 g	510 g	3100 g	6100 g
Readability	0.0001 g	0.001 g	0.001 g	0.01 g	0.01 g
Typical stabilization time *)	< 0.4 s	< 0.2 s	< 0.2 s	< 0.2 s	< 0.2 s
with required weighing tolerance of	0.001 g	0.01 g	0.01 g	0.1 g	0.1 g
Linearity (10 ... 30 °C, typ.)	+/- 0.0004 g	+/- 0.001 g	+/- 0.002 g	+/- 0.03 g	+/- 0.04 g
Repeatability (s) (good conditions)	0.0001 g	0.001 g	0.001 g	0.01 g	0.01 g
Dimensions of load plate (standard types)	Ø 45 mm	Ø 45 mm	Ø 55 mm	80 x 80 mm	80 x 80 mm

*) Weighing time = stabilization time plus (adjustable) observation time

General technical data

Dimensions of weighing module:	Length 240 mm; width 85 mm; height of platform above mounting surface 126 mm
Degree of protection:	IP54; IP66 in wash-down configuration
Operating temperature range:	+ 10...30 °C
Allowable ambient temperature range:	+ 5...40 °C
Data transmission rate:	Up to 38 updates per second
Data interfaces:	RS 232 and RS 422, direct connection - without terminal, Profibus DP, DeviceNet and Ethernet TCP/IP, with optional accessory modules

Standard features

- Stainless steel housing
- Built-in overload protection
- Load plate with double-labyrinth seal
- Equipped for below-the-balance weighing
- Built-in adjustment weight
- Subtractive preload
- RS232 / RS422 interface
- Digital inputs/outputs
- Detailed operating instructions
- CD with configuration and visualization software

Accessories

- Various load plates
- Various connecting cables
- Connection modules (recommended)
- Profibus DP module
- DeviceNet module
- Ethernet TCP/IP module
- Digital displays
- Adjustment weights
- Level indicator
- Startup set

Options

- Wash-down configuration



Typical configurations

