

# Weighing Terminals



## IND310

Powerful - weighing functions

Flexible - your choices

Efficient - saves time

Reliable - 24/7 operation

**Operator friendly weighing**  
**Eliminates delays and keeps traffic moving**

**METTLER TOLEDO**

# Shipping and receiving made easy no matter how you weigh your vehicles

- Weigh and store your inbound/outbound shipments or deliveries
- Automatically determine what you receive or ship
- IND310 supports stored, temporary and transient tare weights

## Powerful – weighing functions

The IND310 includes an efficient database that stores temporary or permanent vehicle weights. User defined information can be tracked in configurable tables.

## Flexible – print custom label formats

Print your existing ticket format using a customised template with both inbound and outbound transactions. You also have the freedom to define your management reports independently from your transaction document and include the data that you want in your exact format.

## Efficient – customise to save time and money

Customise the graphic display to your needs with configurable shortcut keys. Features can be enabled or disabled to suit specific transaction requirements. Automatic ID generation and quick start options speed up transactions.

## Reliable – 24/7

The heavy duty stainless steel enclosure is strong enough for the toughest vehicle environments. In addition, the IND310 is designed to work with lightning protection systems offered by METTLER TOLEDO. Using these systems, the IND310 has passed third party testing with surges up to 10,000 amps.


## Application support

The IND310 comes with a PC application called PCTools. PCTools allows the user to backup and restore terminal configuration, to remotely configure the IND310, or to export and import database tables via Microsoft® Excel.

## Accurate weighing

The IND310 supports up to two scales, either analogue or POWERCELL. Transactions on one scale are seamlessly linked to transactions on the other scale.

Your system  
via Ethernet

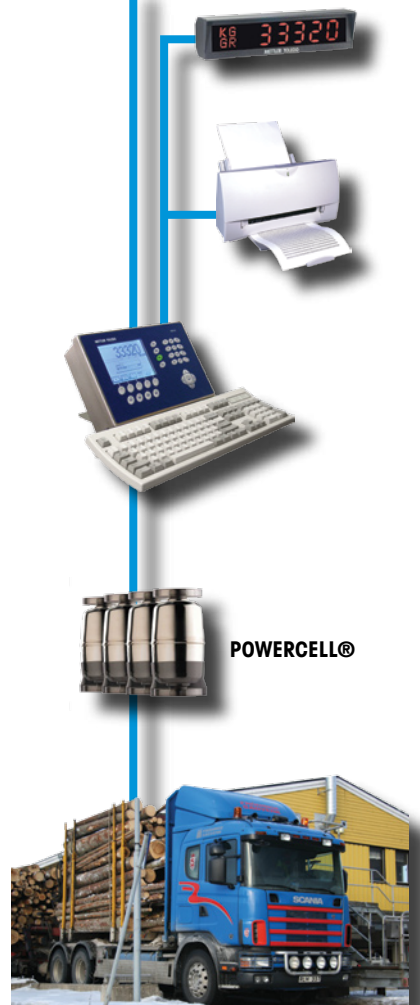



**Easy to read display**

Shows only the data you need and eliminates operator errors.

**Ten configurable soft keys**

Quickly access the functions you want/need.

**Fast database search**

Quickly find records in your database.

**Supports up to two printers**

Print inbound/outbound transaction tickets and management reports.

**Alibi function (Europe)**

Minimum of three months.

**Multi-lingual**

Supports English, German, French, Spanish, Italian....

**USB memory stick**

For easy backup and restore of your database and configuration data.

**Indexed weighing**

Allows you to link database items such as driver, vehicle and product to reduce operator keystrokes.


**Four application keys**

Allows quick access to database.

- Permanent trucks
- Temporary trucks
- Transactions
- User defined tables

**User oriented view angle**

Easily adjust the viewing angle with the base bracket and "skewer" quick release clamp.

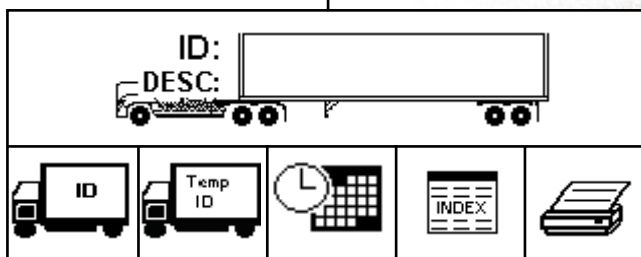

Technical data

## IND310

### Vehicle Weighing Terminal



Enclosure type	Heavy-duty stainless steel with quick-adjust wall or desk mount stand
Environmental protection	Inside/outside (washable) IP69K -10°C to +40°C (14°F to 104°F) approved. -20°C to +50°C operational. 10 to 95% humidity, non-condensing.
Power	Universal internal AC power supply 87 to 264 VAC, 49 to 61Hz
Graphic display	Bright 1/4 VGA LCD (320x240 pixels) with backlight
Analogue load cells (per channel)	8 (350Ω) to 22 METTLER TOLEDO Model 0782
Weight display	Clear and adjustable up to 24mm (0.9in) character height
Number of scales	Up to two platforms
Scale Types	Analogue, POWERCELL®, and POWERCELL® MTX load cells
Number of load cells	Eight 350Ω analogue load cells per channel, maximum of two channels. Ten POWERCELL® or POWERCELL® MTX load cells (24 with optional external power supply).
External keyboard	Terminal supports optional external keyboard via PS2 connector
Communications	Two serial ports: RS-232, 20 mA CL, RS-422, RS-485, TCP/IP 10Base-T Ethernet
Dimensions (WxDxH)	300mm x 270mm x 190mm 11.8in x 10.6in x 7.5in
Net / Shipping Weight	5.5kg / 8.0kg, 12lb / 17lb
Approvals	UL 60950, Class III/IIII/IIIIHD NTEP CC04-032, CE, TÜV, EN45501, EN55022, 89/336/EU, TC6498, T2206, T2391, OIML R76, AM5539

[www.mt.com](http://www.mt.com)

Visit for more information

**nefton**  
Ζύγιση  
Σήμανση  
Συμπόρφωση

Νεύτων Τεχνολογίες ΑΒΕΕ  
Γέρακα 113, Τ.Θ. 67934  
15344 Γέρακος  
Τηλ: 210 6654544  
Fax: 210 6654545  
marketing@nefton.gr  
www.nefton.gr



**Quality certification.** Development, production, and auditing in accordance with ISO9001. Environmental management system in accordance with ISO14001.

**ServiceXXL®**  
Tailored Services

**Tailored Services.** Our extensive service network is among the best in the world and ensures maximum availability and service life of your product.



**Conformité Européene**  
This label is your guarantee that our products conform to the latest guidelines.